


Round Duplex Tubing for 250µM Fiber / Uniboot

Opticonx LightTube™ 2mm and 3mm round duplex breakout tubing is designed for quick and easy direct termination with Uniboot LC connectors. Specifically designed to allow two 250µM buffered fibers to be quickly and easily inserted into a single tube via two 500µM x 900µM inner tubes. Works with any manufacturer's cable or connectors.



Product Features:

- ◆ 18 Colors Available
- ◆ Smooth fiber insertion
- ◆ Low shrinkage
- ◆ RoHS & REACH compliant
- ◆ Custom print legends and striping available
- ◆ Pull string available
- ◆ Custom constructions available

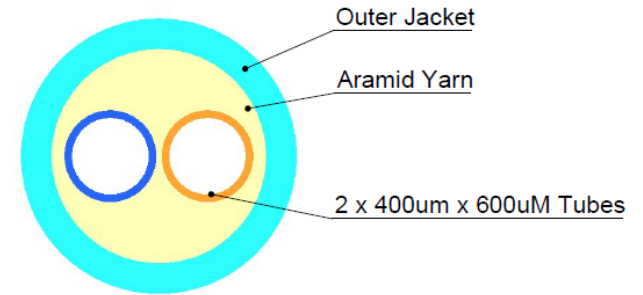

Ordering Information:

Part Number	Legacy Part Number	Jacket Material	Inner Tube		Operating Temp	Shrinkage @ 85° C	Min Bend Radius		Weight
			Material	OD x ID mm			Install	Service	
U20506040XX00	703DUP-XXX	PVC	Polypropylene	2 x 600X400µm	-20C to +75C	<2%	5cm	2.5cm	5.07kg/km
U30509250XX00	707DUP-XXX	PVC	TPE (Hytrel®)	2 x 900X500µm	-20C to +75C	<2%	5cm	2.5cm	5.07kg/km

Replace 'XX' with Color Code

BL = Blue	BR = Brown	RD = Red	VI = Violet	NA = Natural	MG = Magenta
OR = Orange	SL = Slate (Gra	BK = Black	PK = Pink	LM = Lime	TN = Tan
GR = Green	WH = White	YL=Yellow	AQ = Aqua	OL = Olive	EV = Erika Violet

